





G-SENS

House of Industrial Automation & Switch gears :

- ◆ AUTOMATION
- ◆ CONTROL GEAR
- ◆ SWITCH GEAR
- ◆ SIGNAL LIGHT
- ◆ PANEL ACCESSORIES



PRICE LIST



Visit us at : www.girdharelectronic.com



G-SENS LED INDICATOR 22.5 mm
[HSN CODE : 8536 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	COLOUR	PRICE
	AD22-22DS	240VAC 24VDC	RED / GREEN / YELLOW / AMBER	50.00
			BLUE / WHITE	60.00




G-SENS DIGITAL PANEL METER 22.5 mm
[HSN CODE : 9030 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	COLOUR	PRICE
	AD101-22VM	DIGITAL VOLT METER (ROUND) AC20-500V	RED / GREEN / BLUE / YELLOW / WHITE	160.00
	AD101-22VMS	DIGITAL VOLT METER (SQUARE) AC20-500V	RED / YELLOW / BLUE	160.00
	AD101-22AMS	DIGITAL AMP METER SQUARE 0-100A	RED / YELLOW / BLUE	350.00
	AD101-22VAM	DIGITAL AMP+VOLT METER (ROUND) 0-100A 50-500V	RED / YELLOW / BLUE	500.00
	AD101-22VAM	DIGITAL AMP+VOLT METER (SQUARE) 0-100A 50-500V	RED / YELL OW / BLUE	500.00

G-SENS ELEMENT
[HSN CODE : 8538 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	COLOUR	PRICE
	GES-BE101	CONTACT ELEMENT (1 NO)	GREEN	24.00
	GES-BE102	CONTACT ELEMENT (1 NC)	RED	24.00


G-SENS PUSH BUTTON 22.5 mm
[HSN CODE : 8536 (18%)]

PRODUCT	CAT NO. (METAL)	DESCRIPTION	COLOUR	PRICE
	GES5BA	PUSH BUTTON 22.5MM	RED / YELLOW / BLACK/ GREEN / WHITE /BLUE	54.00
	GES5BD2C	SELECTOR SWITCH LETCHED 2 POSITION	BLACK	70.00
	GES5BD3C	SELECTOR SWITCH LETCHED 3 POSITION	BLACK	70.00
	GES5BD4C	SELECTOR SWITCH SPRING RETURN 2 POSITION	BLACK	70.00
	GES5BD5C	SELECTOR SWITCH SPRING RETURN 3 POSITION	BLACK	70.00

G-SENS PUSH BUTTON 22.5 mm
[HSN CODE : 8536 (18%)]

PRODUCT	CAT NO. (METAL)	DESCRIPTION	COLOUR	PRICE
	GES5BC4C	MASHROOM PUSH BUTTON SPRING RETURN	RED / GREEN	80.00
	GES5BS54C	EMERGENCY STOP PUSH BUTTON TURN TO RELEASE	RED / GREEN	80.00
	GESBL832C	TWIN PUSH BUTTON	RED / GREEN	140.00

G-SENS ILLUMINATED PUSH BUTTON & SELECTED SWITCH [HSN CODE : 8536 (18%)]

PRODUCT	CAT NO. (METAL)	DESCRIPTION	COLOUR	PRICE
	GESBE83C	ILLUMINATED PUSH BUTTON LED 240VAC 24 VAC/DC	RED / GREEN	200.00
	GESBK2C	LIGHTED LUMINOUS LED STAYPUT ACTION 2 POSITON 240VAC / 24VAC/DC	RED / GREEN	200.00
	GESBK3C	LIGHT LUMINOUS LED SELECTOR STAYPUT ACTION 3 POSITION 240VAC / 24VAC/DC	RED / GREEN	200.00

G SENS THERMAL OVERLOAD RELAY [HSN CODE : 8536 (18%)]

PRODUCT	CAT NO.	SETTING RANGE AMPS.	CONTRACTORS TO BE PLUGED	PRICE
	G-SENS D-13	0.25 - 0.40 AMPS.	G-SENS 09 ~ 32	600.00
		0.40 - 0.63 AMPS.		
		0.63 - 1 AMPS.		
		1 - 1.6 AMPS.		
		2.5 - 4 AMPS.		
		4 - 6 AMPS.		
		5.5 - 8 AMPS.		
		7 - 10 AMPS.		
		9 - 13 AMPS.		
		12 - 18 AMPS.		
		17 - 25 AMPS.		
		22 - 32 AMPS.		

G SENS AC CONTACTOR [HSN CODE : 8536 (18%)]

PRODUCT	CAT NO.	AMPS.	VOLT	PRICE
 	0910 (1 NO) / 901 (1NC)	9 AMPS.	24 V 48 V 110 V 240 415	550.00
	1210 (1 NO) / 1201 (1NC)	12 AMPS.		600.00
	1810 (1 NO) / 1801 (1NC)	18 AMPS.		600.00
	2510 (1 NO) / 2501 (1NC)	25 AMPS.		900.00
	3210 (1 NO) / 3201 (1NC)	32 AMPS.		1000.00
	GE-4011	40 AMPS.		2200.00
	GE-5011	50 AMPS.		2500.00
	GE-6511	65 AMPS.		3000.00
	GE-8011	80 AMPS.		3800.00
	GE-9511	95 AMPS.		4500.00

G SENS AUXILIARY CONTACT BLOCK [HSN CODE : 8536 (18%)]


PRODUCT	CAT NO.	DESCRIPTION	PRICE
	LA1-DN11	ADD ON BLOCK 1 NO / 1 NC	110.00
	LA1-DN11	ADD ON BLOCK 1 NO / 1 NC	160.00

G SENS SOLID STATE RELAY (SSR) [HSN CODE : 8536 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GDA-480-10 (10A)	SINGLE PHASE DC TO AC SSR	400.00
	GDA-480-16 (16A)	INPUT CONTROL VOLTAGE : 3-32VDC	425.00
	GDA-480-25 (25A)	OUTPUT LOAD VOLTAGE : 12-480VAC	450.00
	GDA-480-40 (40A)	SWITCH TIME : 10MS, FREQUENCY RANGE : 50-60 HZ	600.00
	GDA-480-50 (50A)		900.00
	GDA-480-75 (75 A)		1500.00
	GDA-480-90 (90 A)		1800.00

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GAA-480-10 (10A)	SINGLE PHASE AC TO AC SSR	400.00
	GAA-480-16 (16A)	INPUT CONTROL VOLTAGE : 90-280VAC	425.00
	GAA-480-25 (25A)	OUTPUT LOAD VOLTAGE : 12-480 VAC	450.00
	GAA-480-40 (40A)	SWITCH TIME : 10MS, FREQUENCY RANGE : 50-60Hz	600.00
	GAA-480-50 (50A)		900.00
	GAA-480-75 (75A)		1500.00
	GAA-480-90 (90A)		1800.00

HEAT SHRINK FOR SSR [HSN CODE : 8538 (18%)]

PRODUCT	DESCRIPTION	PRICE
	HEAT SHRIK FOR SSRS UP TO 40 A SINGLE PHASE	160.00
	3 PHASE HEAT SHRINK	800.00

3 PHASE SSR DC TO AC [HSN CODE : 8536 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	G3DA-480-10 (10A)	THREE PHASE DC TO AC SSR	1600.00
	G3DA-480-25 (25A)	INPUT CONTROL VOLTAGE : 3-32VDC	2200.00
	G3DA-480-40 (40A)	OUTPUT LOAD VOLTAGE : 12-480VAC	3000.00
	G3DA-480-50 (50A)	SWITCH TIME : 10MS, FREQUENCY RANGE : 50-60 HZ	3800.00
	G3DA-480-75 (75 A)		5100.00
	G3DA-480-90 (90 A)		5800.00

3 PHASE SSR AC TO AC [HSN CODE : 8536 (18%)]




PRODUCT	CAT NO.	DESCRIPTION	PRICE
	G3AA-480-10 (10A)	THREE PHASE AC TO AC SSR	2000.00
	G3AA-480-25 (25A)	INPUT CONTROL VOLTAGE : 90-280VAC	3000.00
	G3AA-480-40 (40A)	OUTPUT LOAD VOLTAGE : 12-480 VAC	3200.00
	G3AA-480-50 (50A)	SWITCH TIME : 10MS, FREQUENCY RANGE : 50-60Hz	4200.00
	G3AA-480-75 (75A)		5800.00
	G3AA-480-90 (90A)		6400.00

SOCKET PC MATERIALS HIGH QUALITY 10AMP (OPEN TYPE) [HSN CODE : 8536 (18%)]

PRODUCT	DESCRIPTION	PRICE
	PF-083-A	40.00
	PF-113-A	50.00
	LPYF-08-A	50.00
	LPYF-14A	50.00

G SENS PROXIMITY SENSOR [HSN CODE : 9031 (18%)]

DC INDUCTIVE PROXIMITY SENSOR 3 WIRE 10-30V DC, 2 METER CABLE ("CE" Approved)

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GR04 (F) THREADING TYPE	M04 INDUCTIVE PROXIMITY SWITCH THREADING TYPE	3000.00
	GR05/GES06(F) THREADING TYPE	M05 / M06 / INDUCTIVE PROXIMITY SWITCH THREADING TYPE	1600.00
	GR-08 /DP/DN/DPN/DNN(F)	M08 PNPNO / NPN-NO / PNP - NC / NPN-NC NON FLUSH 1 MM SENSING	600.00
	GR-08 /DP/DN/DPN/DNN(NF)	M08 PNPNO / NPN-NO / PNP - NC / NPN-NC NON FLUSH 2 MM SENSING	
	GR-12 /DP/DN/DPN/DNN(F)	M-12 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 2 MM SENSING	450.00
	GR-12 /DP/DN/DPN/DNN(NF)	M-12 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 4 MM SENSING	
	GR-18 /DP/DN/DPN/DNN(F)	M-18 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 4 MM SENSING	
	GR-18 /DP/DN/DPN/DNN(NF)	M-18 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 8 MM SENSING	
	GR-30 /DP/DN/DPN/DNN(F)	M-30 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 10 MM SENSING	600.00
	GR-30 /DP/DN/DPN/DNN(NF)	M-30 PNP NO / NPN-NO/ PNP-NC / NPN-NC NON FLUSH 15 MM SENSING	

G SENS AC INDUCTIVE PROXIMITY SENSOR 2 WIRE 90-270V AC, 2 METER CABLE
[HSN CODE : 9031 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GR-08 A/O / AC (NF)	M08 AC NO / AC NC NON-FLUSH 2 MM SENSING	850.00
	GR-08 A/O / AC (F)	M08 AC NO / AC NC NON-FLUSH 1 MM SENSING	
	GR-12 A/O / AC (NF)	M12 AC NO / AC NC NON-FLUSH 4 MM SENSING	550.00
	GR-12 A/O / AC (F)	M12 AC NO / AC NC NON-FLUSH 2 MM SENSING	
	GR-18 A/O / AC (NF)	M18 AC NO / AC NC NON-FLUSH 8 MM SENSING	
	GR-18 A/O / AC (F)	M18 AC NO / AC NC NON-FLUSH 4 MM SENSING	
	GR-30 A/O / AC (NF)	M30 AC NO / AC NC NON-FLUSH 15 MM SENSING	800.00
	GR-30 A/O / AC (F)	M30 AC NO / AC NC NON-FLUSH 10 MM SENSING	

G SENS SQUARE INDUCTIVE PROXIMITY SENSOR 10/30V DC 3 WIRE
[HSN CODE : 9031 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GN-05-DN	17*35 MM PNP NO / NPN NO 5 MM SENSING ADJUSTABLE	550.00
	GL-Q5MF1	17*28 MM PNP NO / NPN NO 5 MM SENSING	550.00

INDUCTIVE PROXIMITY SENSOR DC-2 WIRE 10-30 VDC 2 mtrs. WIRE CABLE ["CE" Approved] - [HSN CODE : 9031 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GR-12-DO (NF) / (F)	M12 DC NO TYPE NON-FLUB 4 MM / FLUSH 2 MM SENSING	800.00
	GR-12-DN (NF) / (F)	M12 DC NC TYPE NON-FLUB 4 MM / FLUSH 2 MM SENSING	800.00
	GR-182-DO (NF) / (F)	M18 DC NO TYPE NON-FLUB 4 MM / FLUSH 2 MM SENSING	800.00
	GR-182-DN (NF) (F)	M18 DC NC TYPE NON-FLUB 4 MM / FLUSH 2 MM SENSING	800.00

INDUCTIVE PROXIMITY SENSOR CONNECTOR TYPE 10-30 VDC ["CE" Approved] [HSN CODE : 9031 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GR-08-DPC/DNC (NF)	M 08 PNP NO NON-FLUSH/NPN NO NON-FLUSH 2MM SENSING 3 PINS	900.00
	GR-08-DPC/DNC (F)	M 08 PNP NO / NPN NO FLUSH 1 MM SENSING 3 PINS	
	GR-12-DPC/DNC (NF)	M 12 PNP NO / NPN NO NON-FLUSH 4MM SENSING 4 PINS	600.00
	GR-12-DPC/DNC (F)	M 12 PNP NO / NPN NO FLUSH 2 MM SENSING 4 PINS	
	GR-18-DPC/DNC (NF)	M 18 PNP NO / NPN NO NON-FLUSH 8MM SENSING 4 PINS	
	GR-18-DPC/DNC (F)	M 18 PNP NO / NPN NO FLUSH 5 MM SENSING 4 PINS	
	GR-30-DPC/DNC (NF)	M 30 PNP NO / NPN NO NON-FLUSH 15MM SENSING 4 PINS	1000.00
	GR-30-DPC/DNC (F)	M 30 PNP NO / NPN NO FLUSH 10 MM SENSING 4 PINS	

SPARE CONNECTORS FOR 12mm BASE SUITABLE FOR M12 / M18 / M30 WITH 2 MTR CABLE [HSN CODE : 9031 (18%)]

PRODUCT	DESCRIPTION	PRICE
	STRAIGHT TYPE	300.00
	ANGULAR TYPE	

G-SENS PHOTO ELECTRIC SENSOR 10-30 DC AVAILABLE IN METAL BODY (DIFFUSE TYPE) SENSOR [HSN CODE : 9031 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GPC12 DP	PNP NO. THREAD TYPE, 3 WIRE 80MM SENSING SENSOR	1600.00
	GPC12 DN	NPN NO, THREAD TYPE - 3 WIRE 80 MM SENSING SENSOR	
	GPC018 DP-500	M-18 PNP (NO+NC) 100MM Sensing - 4 Wire Type SENSOR	1100.00
	DPC-18 DN 500	M-18 PNP (NO+NC) 100MM Sensing - 4 Wire Type SENSOR	
	DPC-30 DP-1000	M-30 PNP (NO+NC) 1000 MM Sensing - 4 Wire Type SENSOR	1600.00
	DPC-30 DN-1000	M-30 NPN (NO+NC) 1000 MM Sensing - 4 Wire Type SENSOR	
	DPC-18-AO	M-18 ACNO (9-270VAC) 500 MM Sensing - 2 Wire SENSOR	2000.00
	DPC-30-AO	M-30 ACNO (9-270VAC) 1000 MM Sensing - 2 Wire SENSOR	1600.00

G-SENS THROUGH BEAM PHOTOCCELL, 10-30V DC, 4 WIRE SENSOR [HSN CODE : 9031 (18)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GPC18 DPNT	4 WIRE, 10-30 DC, PNP NO + NC 5MTR SENSING DISTANCE	1400.00
	GPC18 DNNT	4 WIRE, 10-30 DC, PNP NO + NC 5MTR SENSING DISTANCE	

LIMIT SWITCH SIZE INDUCTIVE PROXIMITY SWITCH

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	HY-3020 C	PNP NO 30X30X60 mm Square Type 20mm Sensing 10-30 V 3 Wire DC	2000.00
	HY-3020A	NPN NO 30X30X60 mm Square Type 20mm Sensing 10-30 V 3 Wire DC	
	HY-3020AL	30X30X60 mm Square Type 20mm Sensing 10-3V 2 Wire DC	

G-SENS THROUGH BEAM PHOTOCCELL, 10-30V DC, 4 WIRE SENSOR [HSN CODE : 9031 (18)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	GHD20 DP/DN	SIZE 50 X 50 MM, PNP NO / NPN NO 20MM SENSING SQURE FRONT, WALL MOUNTIG	1200.00

MICRO SWITCHES XV 15A - 250 V AC ("UL", "CE", ROHS" Approved) [HSN CODE : 8536 (18%)]

XV-15-1C25



Bottom Type
Price : 70.00

XV-151-1C25



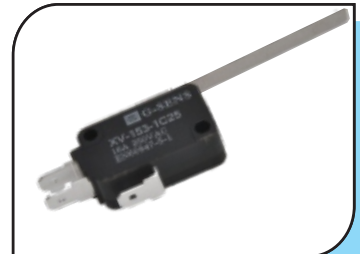
Pivot short handle type
Price : 70.00

XV-152-1C25



Pivot handle type
Price : 70.00

XV-153-1C25



Pivot long handle type
Price : 70.00

XV-154-1C25



Pivot R handle type
Price : 70.00

XV-155-1C25



Pivot drum short handle type
Price : 70.00

XV-156-1C25



Pivot handle type
Price : 70.00

XV-15-1B25



Button type, screw type Basic
Price : 70.00

SUB-MINATURE MICRO SWITCHES 'XSS' SERIES 15A - 250V AC ("UL", "CE", "ROHS" Approved) [HSN CODE : 8536 (18%)]

X-SS-5



Sub Miniature Button type
Price : 60.00

XSS-5GL



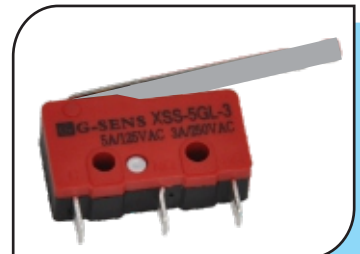
Sub Miniature Pivot Handle type
Price : 60.00

XSS-5GL2



Sub Miniature Pivot Drum Handle type
Price : 60.00

XSS-5GL3



Sub Miniature Pivot Drum Handle Type
Price : 60.00

MICRO SWITCHES 'XZ' SERIES 15A-250V AC 1 NO + 1NC (SCREW TYPE BOTTOM ["UL", "CE", "RoHS" Approved [HSN CODE : 8536 (18%)]

XZ-15G-B



Price : 220.00

XZ-15GS-B



Price : 250.00

XZ-15GW2-B



Price : 220.00

XZ-15GW3-B



Price : 220.00

XZ-15GW2277-B



Price : 280.00

XZ-15GQ21-B



Price : 300.00

XZ-15GHW24-B



Price : 300.00

XZ-15GD-B



Price : 220.00

XZ-15GW-B



Price : 220.00

XZ-15GW22-B



Price : 220.00

XZ-15GW21-B



Price : 220.00

XZ-15GQ-B



Price : 300.00

XZ-15GQ22-B



Price : 300.00

XZ-15HW78-B



Price : 320.00

MICRO SWITCH COVER FOR XZ SERIES



Price : 60.00

MINI LIMIT SWITCHES METAL VERSION IP 65 (UL, CE, RoHS Approved) 10 A 1 NO + 1NC 22.5 M WIDTH) [HSN CODE : 8535 (18%)]

GE 8104



Price : 550.00

- ◆ Roller Arm type
- ◆ Small size, water and oil resistant ;
- ◆ Double way switch, double spring inner switch;

GE 8107



Price : 550.00

- ◆ Adjustable ROD Lever Type.
- ◆ Small Size, water and oil resistant;
- ◆ Double way switch, double spring Inner switch.

GE 8108



Price : 550.00

- ◆ Adjustable ROD Lever Type.
- ◆ Small Size, water and oil resistant;
- ◆ Double way switch, double spring Inner switch.

GE 8111



Price : 550.00

- ◆ Push Plunger Type
- ◆ Small size, water and oil resistant ;
- ◆ Double way switch, double spring inner switch;

GE 8112



Price : 550.00

- ◆ Roller Plunger Type.
- ◆ Small size, water and oil resistant ;
- ◆ Double way switch, double spring inner switch;

GE 8122



Price : 550.00

- ◆ Cross Roller Plunger Type.
- ◆ Small size, water and oil resistant ;
- ◆ Double way switch, double spring inner switch;

GE 8166



Price : 550.00

- ◆ Half Spring Half Plastic Rod.
- ◆ Small size, water and oil resistant ;
- ◆ Double way switch, double spring inner switch;

GE 8167



Price : 550.00

- ◆ Full Spring Rod.
- ◆ Small Size, water and oil resistant;
- ◆ Double way switch, double spring Inner switch.

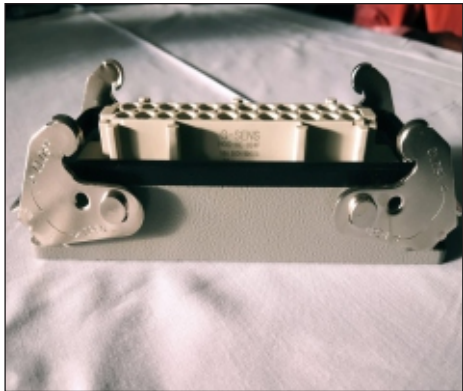
GE 8168



Price : 550.00

- ◆ Half Spring Half Metal Road.
- ◆ Small Size, water and oil resistant;
- ◆ Double way switch, double spring Inner switch.

G-SENS HEAVY DUTY METAL RECTANGULAR TYPE
[HSN CODE : 8536 (18%)]
MALE FEMALE WITH HOUSING 16AMP 500 V IP65

PRODUCT	CAT NO.	DESCRIPTION	PRICE
  	H4B-HE-004-1	4 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-PANEL MOUNTING	750.00
	H6B-HE-006-1	6 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-SIDE ENTRY 80 (L) *43(B) *72 (H)	950.00
	H10B-HE-010-1	10 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-SIDE ENTRY 113 (L) *43 (B) *86 (H)	1200.00
	H16B-HE-016-1	16 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-SIDE ENTRY 113 (L) *43 (B) *86 (H)	1300.00
	H24B-HE-024-1	24 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-SIDE ENTRY 140 (L) *43 (B) *91 (H)	1600.00
	H32B-HE-032-1	32 PIN MALE FEMALE PLUG & SOCKET OPEN TYPE BOTTOM WITH METAL HOOD-SIDE ENTRY 114 (L) *78 (B) *109 (H)	3000.00

MOTOR SIREN & BUZZER [HSN CODE : 8531 (28%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	MS 190	MINI MOTOR SIREN (RANGE -80 - 100 MTR) 24 V DC/220V AC	600.00
	MS 290	MOTOR SIREN (RANGE : 250 - 300 MTR) 24 V DC/220V AC (METAL BODY)	1200.00
	MS 390	MOTOR SIREN (RANGE : 650 - 750 MTR) 24 V DC/220 AC	2800.00
	MS 490	MOTOR SIREN (RANGE : 750-1000 MTR) 220 V AC	7500.00

LED MULTIFUNTINAL WARNING LIGHT (STEADY / FLASHING / REVOLVING SELECTABLE V/A DIP SWITCH) VOLTAGE WIDE RANGE 12-285 AC DC [(HSN CODE : 8531 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
	LTE 1101J	REVOLTING LIGHT WITH BUZZER, 12VDC, 24VDC, 110VAC, 240VAC	700.00

G-SENS TOWER LIGHT LED TYPE 24V DC & 110-240V AC MULTI VOLTAGE [HSN CODE : 8531 (18%)]

PRODUCT	CAT NO.	DESCRIPTION	PRICE
		STEADY / FLASHER TOWER LIGHT STAGE - SINGLE STAGE	900.00
		STEADY / FLASHER TOWER LIGHT STAGE - TWO STAGE	1000.00
		STEADY / FLASHER TOWER LIGHT STAGE - THREE STAGE	1100.00

Manufacturer of Thermocouples

HSN CODE : 9033



HEAD TYPE THERMOCOUPLE

A Thermoelectric device for measuring temperature, consisting of two wires of different metals connected at two points, a voltage being developed between the two junctions in proportion to the temperature difference. **Type : J, K, T, E, N RTD**

MI THERMOCOUPLES

The probes are easily formed or bent, it can accommodate virtually any configuration. The outer sheath protects the thermocouple or RTD from oxidation and hostile environments, and the mineral insulation provides excellent high temperature dielectric strength. **Type : J, K, T, E, N RTD**



HIGH TEMPRETURE THERMOCOUPLE

Head Type Thermocouples are specifically designed for durability and reliability in high temperature applications to 1200c such applications generally involve oxidizing, reducing, inert gas or contamination atmospheres that challenge the life of the thermocouples.

Type : J, K, T, E, N, RTD

THERMOWELL

Thermowell protects the temperature sensor from process conditions such as pressure flow induced forces and chemical effects. Proper temperature element Protection starts with the selection of the thermowell or protection tube.

Type : J, K, T, E, N. RTD Type: J, K, T, E, N RTD



WASHER TYPE THERMOCOUPLES

Surface temperature Thermocouple with washer available in standard sizes such as M6, M8 and M12 etc. Temperature range of -50 to 400 C range. Ideally suitable for Heating, ventilation, air-conditioning, refrigeration systems, Pipeline control, Machinery, plant and tank measurement. **Type : J, K, T, E, N, RTD**

PENCIL TYPE THERMOCOUPLES

Thermocouples provide reliable temperature measurement within a system. The design permits installation of the element in direct contact with the fluid stream, thereby providing reliable temperature measurement. The quick connector affords system flexibility. The thermocouple has a grounded-type junction. **Type : J, K & RTD**



Dealers Enquiry Solicited




Rated Power	Rated Output Current (A)	Model No.	Unit Price FOR AHD (INR)
3PH 380V/415V -20%~20%			
0.75KW/1 HP	2.5	E500-4T0007(B)	15,000.00
1.5 KW/2HP	4.5	E5004T0015(B)	15,900.00
2.2 KW/3 HP	5.5	E5004T0022(B)	17,600.00
4KW/5HP	9.5	E5004T0040(B)	20,600.00
7.5KW/10HP	17	E5004T0075(B)	30,750.00
4KW / 5HP	9.5	E2804T0040	25,000.00
5.5KW / 7.5HP	13	E2804T0055	32,000.00
7.5KW / 10HP	17	E2804T0075	34,400.00
11KW / 15HP	25	E2804T0110	44,850.00
15KW / 20HP	33	E2804T0150	55,150.00
18.5KW / 25HP	39	E2804T0185	65,000.00
22KW / 30HP	45	E2804T0220	86,000.00
30KW / 40HP	60	E2804T0300	95,500.00
37KW / 50HP	75	E2804T0370	1,16,540.00
45KW / 60HP	91	E2804T0450	1,36,770.00
55KW / 75HP	112	E2804T0550	1,57,500.00
75KW / 100HP	150	E2804T0750	2,03512.00
90KW / 120HP	176	E2804T0900	2,56,256.00
110KW / 150HP	210	E2804T1100	2,84,628.00
132KW / 180HP	260	E2804T1320	3,33,188.00

G-SENS SAFETY LIGHT CURTAIN

Curtain's 12 to 24 VDC SLC & SLX Models Slim Model 30 x 30

Parallel Beam (SLC Model)	Protected Height mm	Overall Height mm	No of Beam	Pitch mm	Dealer Price
SLC-0620	100	185	6	20	5,750
SLC-1220	220	305	12	20	9,200
SLC-1820	340	425	18	20	12,650
SLC-2420	460	545	24	20	16,100
SLC-3020	580	665	30	20	20,700
SLC-3620	700	785	36	20	24,150
SLC-0630	150	245	6	30	6,210
SLC-1230	330	425	12	30	9,775
SLC-1830	510	605	18	30	13,225
SLC-2430	690	785	24	30	16,560
SLC-3030	870	965	30	30	21,275
SLC-3630	1050	1145	36	30	25,300
SLC-0640	200	305	6	40	6,210
SLC-1240	440	545	12	40	9,775
SLC-1840	680	785	18	40	13,225
SLC-2440	920	1025	24	40	16,560
SLC-3040	1160	1265	30	40	21,275
SLC-3640	1400	1505	36	40	25,300
SLC-1040	360	455	10	40	8,050
SLC-1030	270	365	10	30	8,050
SLC-1630	450	535	16	30	11,040
SLC-1640	600	690	16	40	11,040
SLC-1690	1350	1440	16	90	12,880
SLC-0650	250	365	6	50	6,440
SLC-1250	550	665	12	50	9,200
SLC-1650	750	855	16	50	11,960
SLC-1850	850	965	18	50	13,455
SLC-2450	1150	1265	24	50	16,790
SLC-3050	1450	1565	30	50	21,505
SLC-3650	1750	1865	36	50	25,875
SLC-4850	2350	2465	48	50	56,649



Type : Parallel Beam
No. of Beams : 6 Nos.
Active Beams : 6 Nos.



Type : Cross Beam
No. of Beams : 6 Nos.
Active Beams : 16 Nos.

For Cross Beam Model Rs -1000 Extra , Dual Output (PNP / NPN)Model Price Extra Rs- 500

Note- Separate Controller Are Available (Wall Mount)



G-SENS

Authorised Distributor / Stockist :

Authorised Dealer :